

Ejemplos pasos de peatones

Operator Moonoff S.L.
Telephone
Fax
e-Mail

Table of contents

Ejemplos pasos de peatones


Project Cover	1
Table of contents	2
Luminaire Data Sheet	3
SIMON TRFDEM S ISTANIUM 36LED GTF TRF_NDL_73W 700mA IA5	
TRFDEM S ISTANIUM 36LED GTF TRF_NDL_73W 700mA IA5	
LDC (Polar)	4
1 columnna	
Luminaire parts list	5
Luminaires (coordinates list)	6
Calculation surfaces (results overview)	7
3D Rendering	8
2 columnas	
Luminaire parts list	9
Luminaires (coordinates list)	10
Calculation surfaces (results overview)	11
3D Rendering	12

Operator Moonoff S.L.
Telephone
Fax
e-Mail

/ Luminaire Data Sheet

See our luminaire catalog for an image of the luminaire.

Luminous emittance 1:

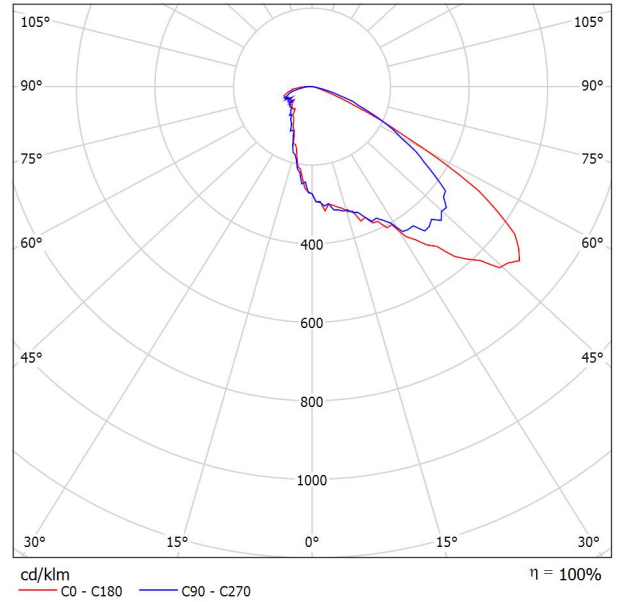


Luminaire classification according to CIE: 100
CIE flux code: 39 81 96 100 100

Due to missing symmetry properties, no UGR table can be displayed for this luminaire.

Operator Moonoff S.L.
Telephone
Fax
e-Mail

SIMON TRFDEM S ISTANIUM 36LED GTF TRF_ NDL _73W 700mA IA5 / LDC (Polar)

Luminaire: SIMON TRFDEM S ISTANIUM 36LED GTF TRF_ NDL _73W 700mA IA5
Lamps: 1 x IW5584

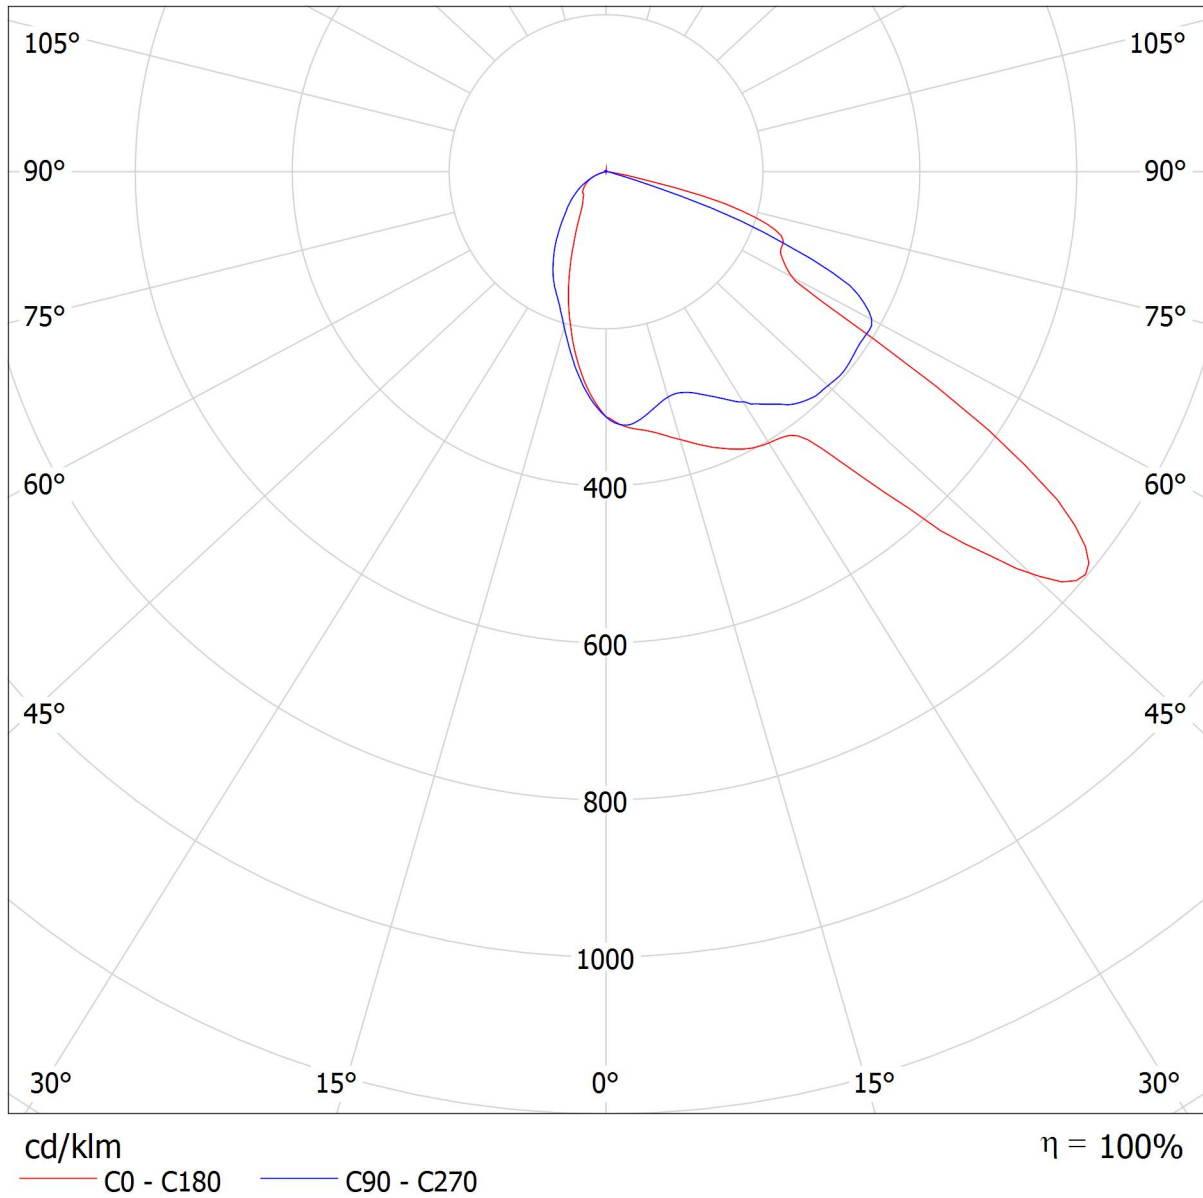


Operator Moonoff S.L.
Telephone
Fax
e-Mail

1 columna / Luminaire parts list

1 Pieces

Article No.:
Luminous flux (Luminaire): 7000 lm
Luminous flux (Lamps): 7000 lm
Luminaire Wattage: 1.0 W
Luminaire classification according to CIE: 100
CIE flux code: 39 81 96 100 100
Fitting: 1 x User defined (Correction Factor 1.000).


See our luminaire catalog for an image of the luminaire.



Operator Moonoff S.L.
 Telephone
 Fax
 e-Mail

1 columna / Luminaires (coordinates list)


7000 lm, 1.0 W, 1 x 1 x User defined (Correction Factor 1.000).

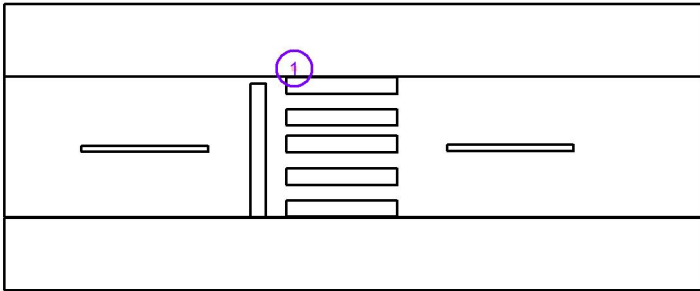

No.	Position [m]			Rotation [°]		
	X	Y	Z	X	Y	Z
1	9.200	8.044	5.000	0.0	0.0	-90.0

Operator Moonoff S.L.
 Telephone
 Fax
 e-Mail

1 columna / Calculation surfaces (results overview)

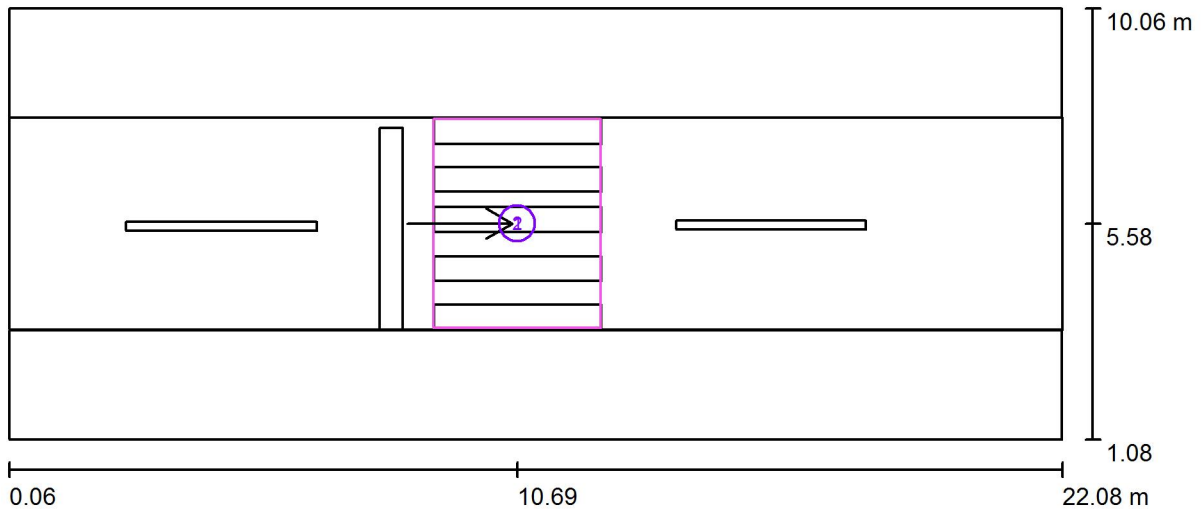

Scale 1 : 158

Calculation Surface List


No.	Designation	Type	Grid	E_{av} [lx]	E_{min} [lx]	E_{max} [lx]	u0	E_{min} / E_{max}
1	Superficie de cálculo calzada	perpendicular	64 x 64	77	54	88	0.705	0.611
2	Superficie de cálculo conductor	vertical, 180.0°	5 x 9	53	12	87	0.230	0.139

Summary of Results

Type	Quantity	Average [lx]	Min [lx]	Max [lx]	u0	E_{min} / E_{max}
perpendicular	1	77	54	88	0.71	0.61
vertical	1	53	12	87	0.23	0.14

Operator Moonoff S.L.
Telephone
Fax
e-Mail

1 column / 3D Rendering

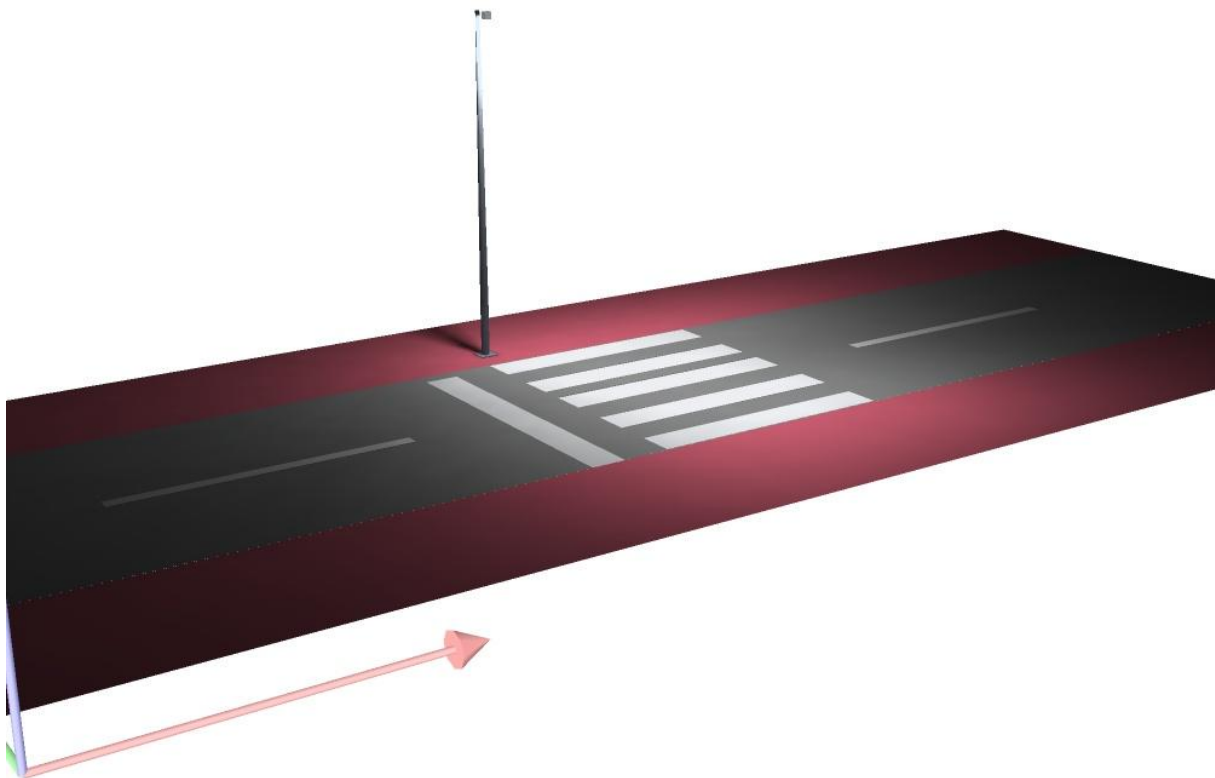


Operator Moonoff S.L.
Telephone
Fax
e-Mail

2 columnas / Luminaire parts list

2 Pieces (Type 1)
Article No.:
Luminous flux (Luminaire): 3500 lm
Luminous flux (Lamps): 3500 lm
Luminaire Wattage: 1.0 W
Luminaire classification according to CIE: 100
CIE flux code: 39 81 96 100 100
Fitting: 1 x User defined (Correction Factor 1.000).

See our luminaire catalog for an image of the luminaire.




Operator Moonoff S.L.
 Telephone
 Fax
 e-Mail

2 columnas / Luminaires (coordinates list)

(Type 1)


3500 lm, 1.0 W, 1 x 1 x User defined (Correction Factor 1.000).

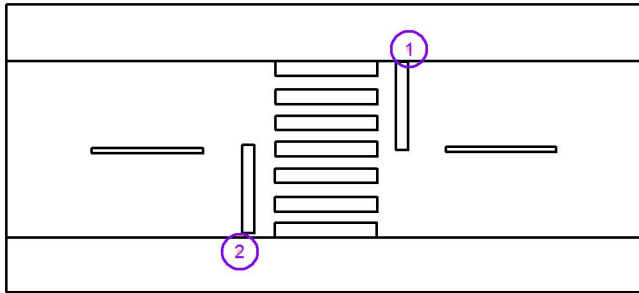

No.	Position [m]			Rotation [°]		
	X	Y	Z	X	Y	Z
1	0.283	2.985	5.000	0.0	0.0	180.0
2	-5.812	-4.268	5.000	0.0	0.0	0.0

Operator Moonoff S.L.
 Telephone
 Fax
 e-Mail

2 columnas / Calculation surfaces (results overview)

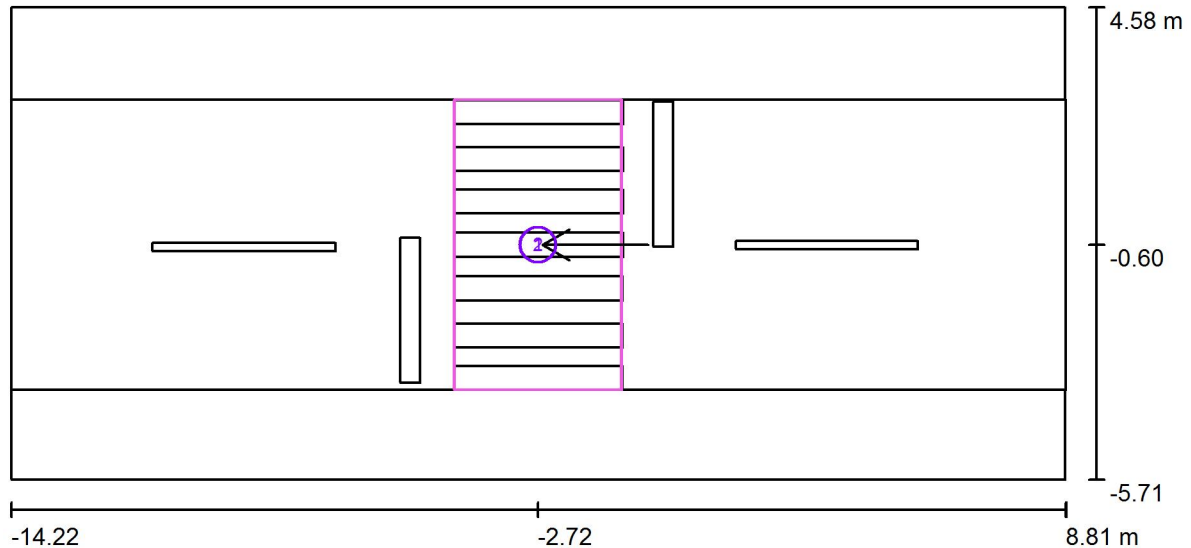

Scale 1 : 165

Calculation Surface List

No.	Designation	Type	Grid	E_{av} [lx]	E_{min} [lx]	E_{max} [lx]	u0	E_{min} / E_{max}
1	Superficie de cálculo calzada	perpendicular	64 x 64	56	41	64	0.733	0.645
2	Superficie de cálculo conductor	vertical, 0.0°	64 x 64	34	11	66	0.314	0.164

Summary of Results

Type	Quantity	Average [lx]	Min [lx]	Max [lx]	u0	E_{min} / E_{max}
perpendicular	1	56	41	64	0.73	0.64
vertical	1	34	11	66	0.31	0.16

Operator Moonoff S.L.
Telephone
Fax
e-Mail

2 columnas / 3D Rendering

