

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	0.0415	-58.0	0.9729	-26.0	16.97	6.0	291.9	38.0	7.105	70.0	0.6517
-88.0	0.1244	-56.0	0.9971	-24.0	24.44	8.0	268.0	40.0	5.798	72.0	0.6184
-86.0	0.1245	-54.0	1.098	-22.0	36.33	10.0	234.9	42.0	4.720	74.0	0.5689
-84.0	0.2280	-52.0	1.180	-20.0	53.94	12.0	196.3	44.0	3.725	76.0	0.5604
-82.0	0.2901	-50.0	1.344	-18.0	76.40	14.0	157.4	46.0	3.062	78.0	0.5068
-80.0	0.2908	-48.0	1.510	-16.0	102.1	16.0	120.5	48.0	2.478	80.0	0.5233
-78.0	0.3110	-46.0	1.857	-14.0	132.0	18.0	85.30	50.0	2.032	82.0	0.4122
-76.0	0.3528	-44.0	2.250	-12.0	164.9	20.0	56.38	52.0	1.665	84.0	0.2996
-74.0	0.3732	-42.0	2.824	-10.0	196.5	22.0	36.37	54.0	1.467	86.0	0.1635
-72.0	0.4151	-40.0	3.604	-8.0	221.9	24.0	23.57	56.0	1.294	88.0	0.1199
-70.0	0.4763	-38.0	4.437	-6.0	243.8	26.0	17.25	58.0	1.177	90.0	0.0140
-68.0	0.5188	-36.0	5.420	-4.0	263.7	28.0	14.55	60.0	1.045		
-66.0	0.6000	-34.0	6.697	-2.0	283.2	30.0	12.05	62.0	0.9457		
-64.0	0.6635	-32.0	8.281	0.0	302.6	32.0	10.56	64.0	0.8964		
-62.0	0.7657	-30.0	10.14	2.0	311.5	34.0	9.697	66.0	0.8175		
-60.0	0.8501	-28.0	12.81	4.0	306.9	36.0	8.686	68.0	0.7264		

Electricity Parameter:

Current I: 0.1590A Power: 0.0W
Voltage V: 36.29V PF: 0.000


Optical Parameter(Distance=3.000m) :

Equivalent Luminous flux: $\Phi_{eff} = 79.34lm$ Efficiency: $Eff=0.00lm/W$
 Diffuse angle: @ (25%): 36.2deg @ (50%): 26.5deg @ (75%): 16.9deg @ (50%): 26.5deg
 Diffuse angle: @ (25%): 36.6deg @ (50%): 27.1deg @ (75%): 17.9deg @ (50%): 27.1deg
 Imax=311.5cd (C=0.0deg,G=2.0deg) C0-180Plane Imax= 311.5cd(G=2.0deg)
 C0-180Plane IO= 302.6cd

Lamp Type:COB LENS
Tester:ASAHI
Temperature:25.3deg
Manufacturer:ASAHI

Luminaires Type:CREE 1512
Test Date:2016-08-04
Humidity:65%
Remarks:ACOB4322D25G

Average Illuminance Figure

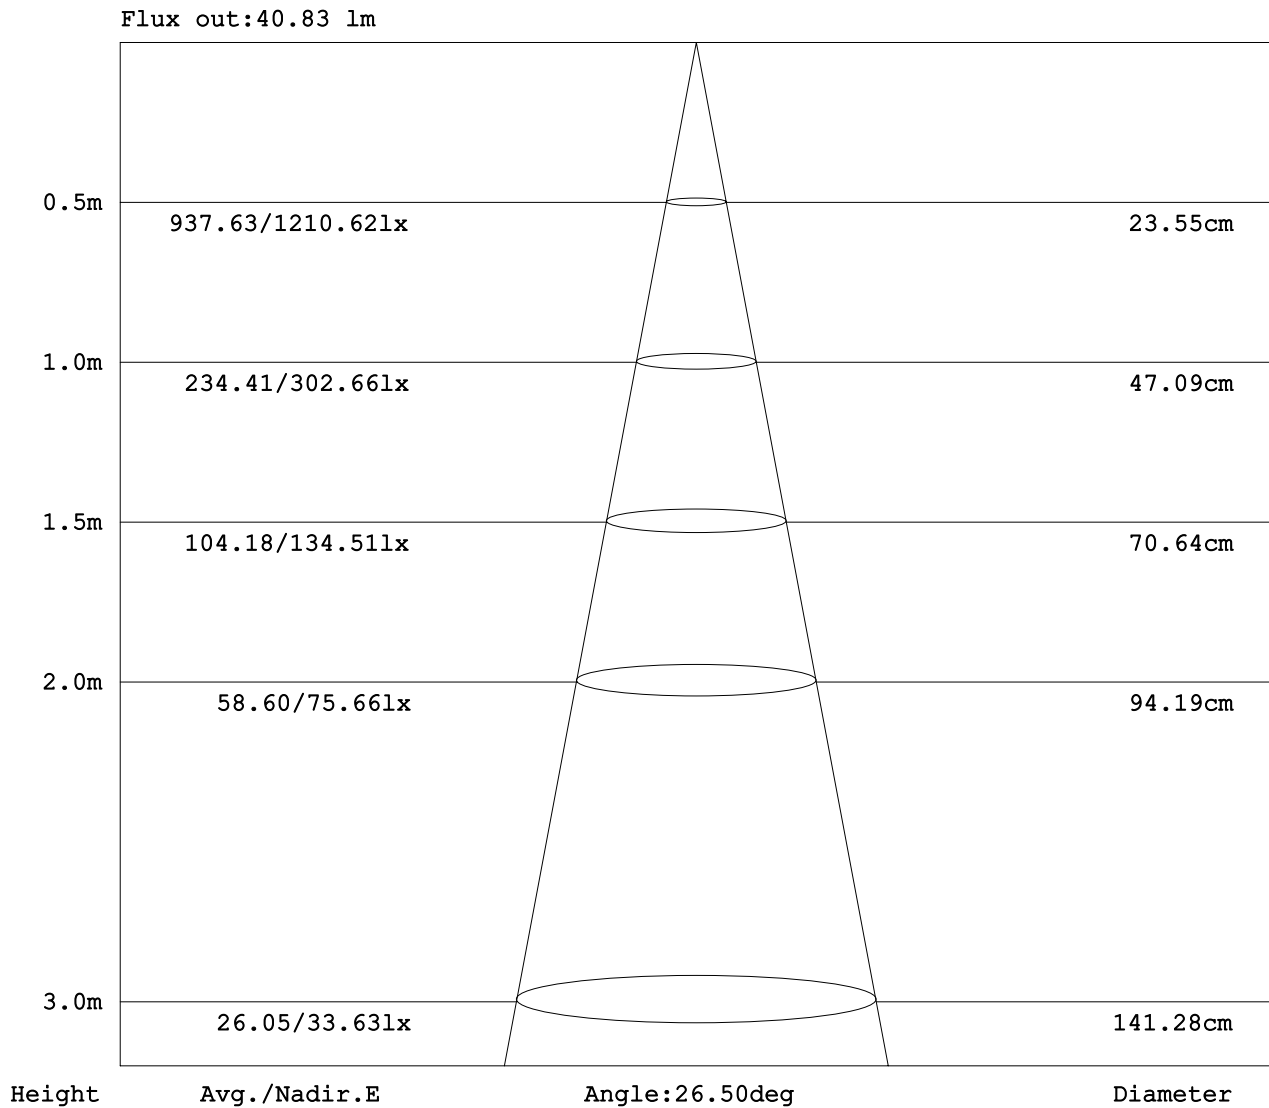

Lamp Type:COB LENS
Tester:ASAHI
Temperature:25.3deg
Manufacturer:ASAHI

Luminaires Type:CREE 1512
Test Date:2016-08-04
Humidity:65%
Remarks:ACOB4322D25G