

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	3.507	-58.0	4.878	-26.0	134.8	6.0	531.1	38.0	30.05	70.0	3.951
-88.0	7.818	-56.0	6.231	-24.0	169.9	8.0	489.6	40.0	25.79	72.0	3.429
-86.0	8.882	-54.0	7.801	-22.0	208.6	10.0	441.6	42.0	22.16	74.0	3.055
-84.0	5.885	-52.0	9.703	-20.0	251.1	12.0	390.2	44.0	19.11	76.0	2.976
-82.0	4.136	-50.0	11.97	-18.0	297.0	14.0	337.0	46.0	16.81	78.0	3.061
-80.0	3.574	-48.0	14.48	-16.0	344.4	16.0	287.5	48.0	14.62	80.0	3.545
-78.0	3.260	-46.0	15.98	-14.0	385.6	18.0	240.3	50.0	12.57	82.0	4.035
-76.0	3.237	-44.0	18.53	-12.0	432.9	20.0	196.8	52.0	10.43	84.0	4.220
-74.0	3.278	-42.0	21.99	-10.0	474.6	22.0	161.5	54.0	8.459	86.0	4.903
-72.0	3.381	-40.0	26.31	-8.0	515.1	24.0	131.1	56.0	6.760	88.0	7.273
-70.0	3.831	-38.0	32.57	-6.0	550.4	26.0	106.5	58.0	5.035	90.0	7.080
-68.0	5.702	-36.0	39.85	-4.0	572.6	28.0	85.44	60.0	4.201		
-66.0	3.835	-34.0	49.87	-2.0	584.8	30.0	67.95	62.0	3.863		
-64.0	3.672	-32.0	64.05	0.0	586.3	32.0	54.55	64.0	3.710		
-62.0	3.897	-30.0	82.12	2.0	578.1	34.0	44.31	66.0	3.635		
-60.0	4.146	-28.0	105.2	4.0	561.6	36.0	36.28	68.0	3.777		

**Electricity Parameter:**

Current I: 0.1580A Power: 0.0W  
Voltage V: 36.29V PF: 0.000


**Optical Parameter(Distance=3.000m) :**

Equivalent Luminous flux:  $\Phi_{eff} = 267.0lm$  Efficiency:  $Eff=0.00lm/W$   
Diffuse angle: @ (25%): 48.1deg @ (50%): 33.8deg @ (75%): 21.6deg @ (50%): 33.8deg  
Diffuse angle: @ (25%): 48.1deg @ (50%): 33.8deg @ (75%): 21.6deg @ (50%): 33.8deg  
Imax=586.3cd (C=0.0deg,G=-1.0deg) C0-180Plane Imax= 586.3cd(G=-1.0deg)  
C0-180Plane IO= 586.3cd

Lamp Type:COB LENS  
Tester:ASAHI  
Temperature:25.3deg  
Manufacturer:ASAHI

Luminaires Type:LUMILEDS  
Test Date:2016-08-04  
Humidity:65%  
Remarks:AKCOB47520D35G

**Average Illuminance Figure**

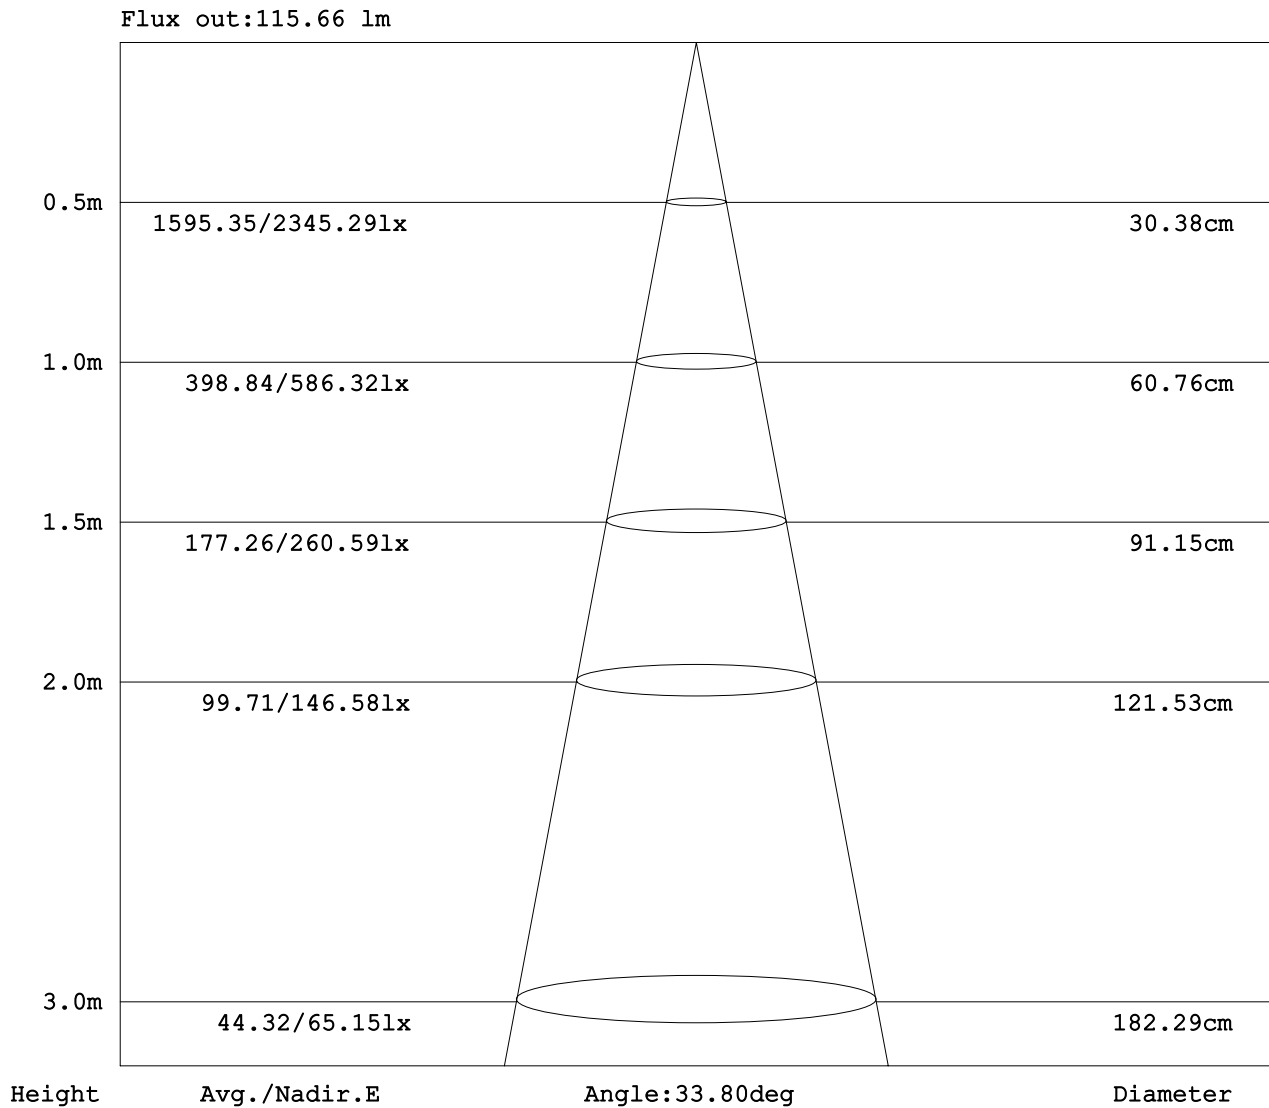

Lamp Type:COB LENS  
 Tester:ASAHI  
 Temperature:25.3deg  
 Manufacturer:ASAHI

Luminaires Type:LUMILEDS  
 Test Date:2016-08-04  
 Humidity:65%  
 Remarks:AKCOB47520D35G